


DFI®

Q7X-151

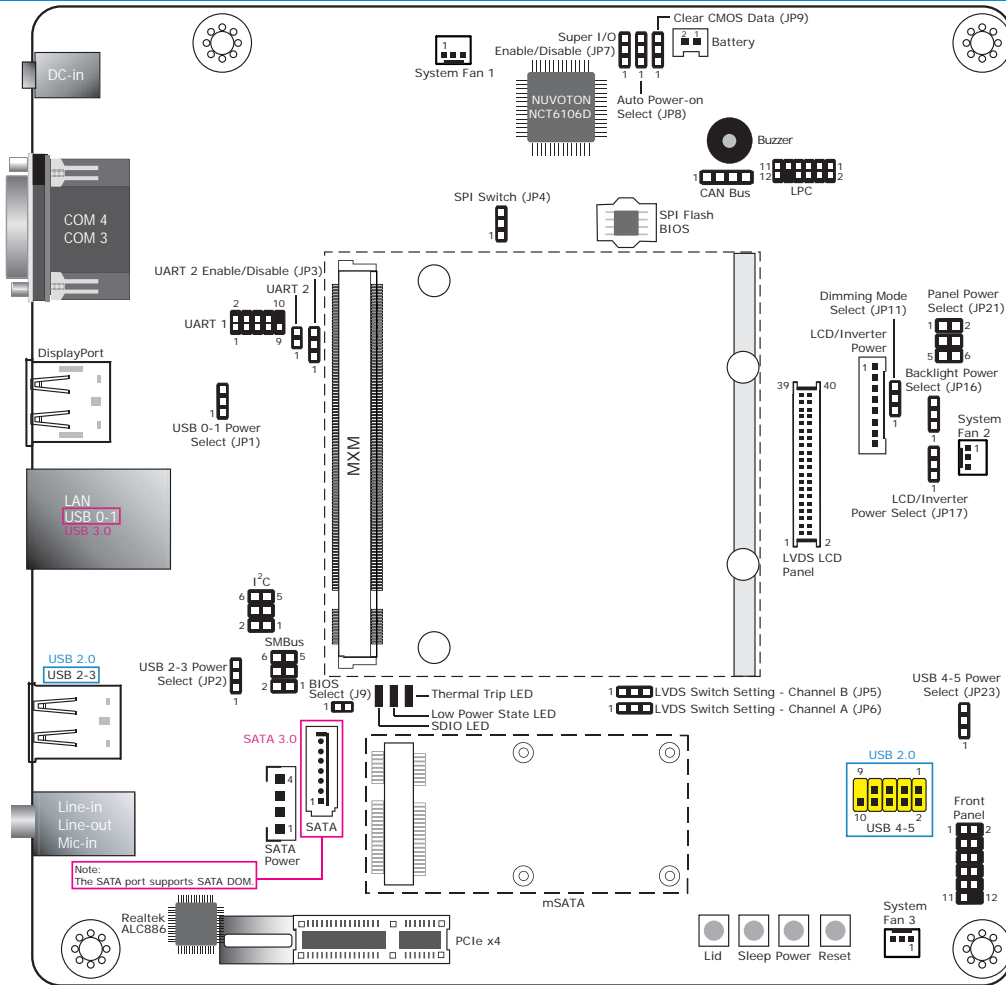

| USB Power Select: 0-1 (JP1), 2-3 (JP2), 4-5 (JP23) | |
|--|--------|
| +5V (default) | 1-2 On |
| +5V_standby | 2-3 On |
| Auto Power-on Select JP8 | |
| Power-on via Super I/O | 1-2 On |
| Power-on via Module (default) | 2-3 On |
| Backlight Power Select JP16 | |
| +3.3V (default) | 1-2 On |
| +5V | 2-3 On |
| Clear CMOS Data JP9 | |
| Normal (default) | 1-2 On |
| Clear CMOS Data | 2-3 On |
| LCD/Inverter Power Select JP17 | |
| +12V | 1-2 On |
| +5V (default) | 2-3 On |
| Panel Power Select JP21 | |
| +12V | 1-2 On |
| +5V | 3-4 On |
| +3.3V (default) | 5-6 On |

| Super I/O Enable/Disable JP7 | | |
|----------------------------------|-----------------|---------------|
| Enable | 1-2 On | |
| Disable (default) | 2-3 On | |
| BIOS Select JP9 | | |
| Boot from carrier board SPI BIOS | 1-2 On | |
| Boot from module SPI BIOS | 1-2 Off | |
| SPI Switch JP4 | | |
| Sensor | 1-2 On | |
| BIOS (default) | 2-3 On | |
| UART 2 Enable/Disable JP3 | | |
| Enable (default) | 1-2 On | |
| Disable | 2-3 On | |
| Dimming Mode Select JP11 | | |
| PWM Mode (default) | 1-2 On | |
| Voltage Mode | 2-3 On | |
| LVDS Switch Setting | | |
| JP6 (Channel A) | JP5 (Channel B) | |
| 1-2 On | High (default) | High |
| 2-3 On | Low | Low (default) |

Note:

1. This QR document applies to BT700/BT701 only.
2. JP5 and JP6 must be set simultaneously.

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.