


# DFI® SB601-C

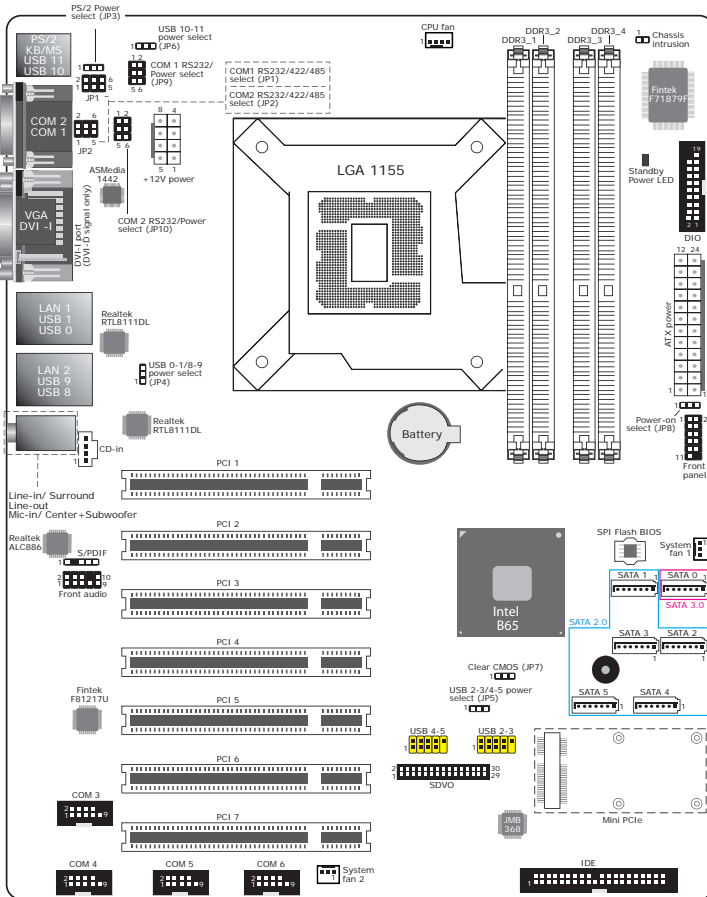

### USB Power: 10-11 (JP6), 0-1/8-9 (JP4), 2-3/4-5 (JP5)

+5V (default)	1-2 On
+5V_standby	2-3 On

### Clear CMOS Data

Normal (default)	JP7 1-2 On
Clear CMOS Data	JP7 2-3 On

### RS232/RS422/RS485 Select: COM 1 (JP1), COM 2 (JP2)

RS232 (default)	COM 1 1-2 On
RS422 Full Duplex	COM 1 3-4 On
RS485	COM 1 5-6 On

### PS/2 Power

+5V (default)	JP3 1-2 On
+5V_standby and supports PS/2 keyboard/ mouse auto swap function	JP3 2-3 On

### Power-on Select

Power-on via power button (default)	JP8 1-2 On
Power-on via AC power; Power-on via WOL After G3	JP8 2-3 On

### RS232/Power: COM 1 (JP9), COM 2 (JP10)

RS232 (default)	COM 1 1-3 (RI), 2-4 (DCD) On
RS232 with power	COM 1 3-5 (+5V), 4-6 (+12V) On

Note: The SDVO connector supports the optional SDVO-LVDS daughterboard.



## Battery Notice

### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

### Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.