



DFI®

BW551

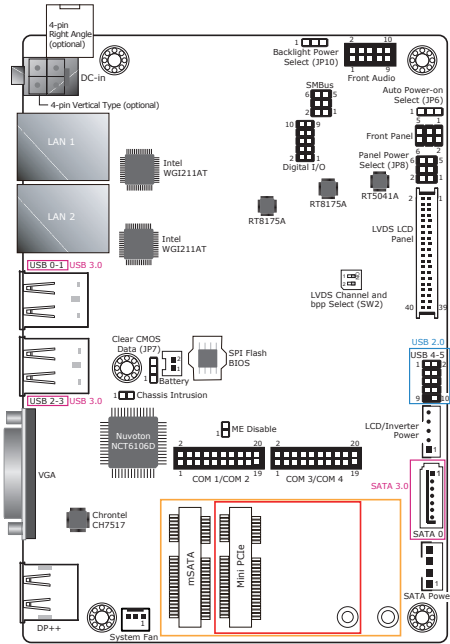

TOP

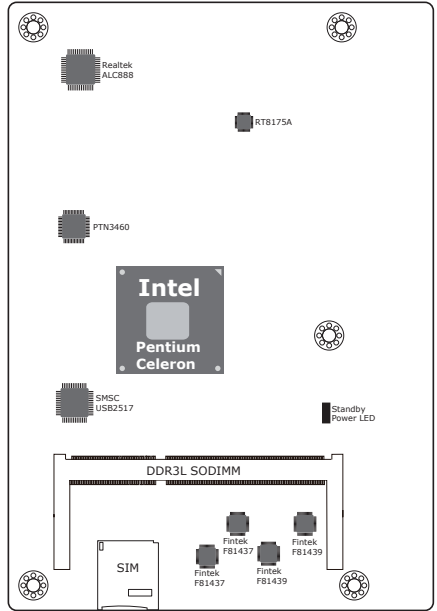

BOTTOM

Panel Power Select	JP8
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

Backlight Power Select	JP10
+3.3V (default)	1-2 On
+5V	2-3 On

Switch 2	1 On	1 Off	2 On	2 Off
LVDS Channel and bpp Select	Single LVDS	Dual LVDS	VESA (24bpp)	JEIDA or VESA (18bpp)

Auto Power-on Select	JP6
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

Clear CMOS Data	JP7
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.