


DFI®

SB100-NRM

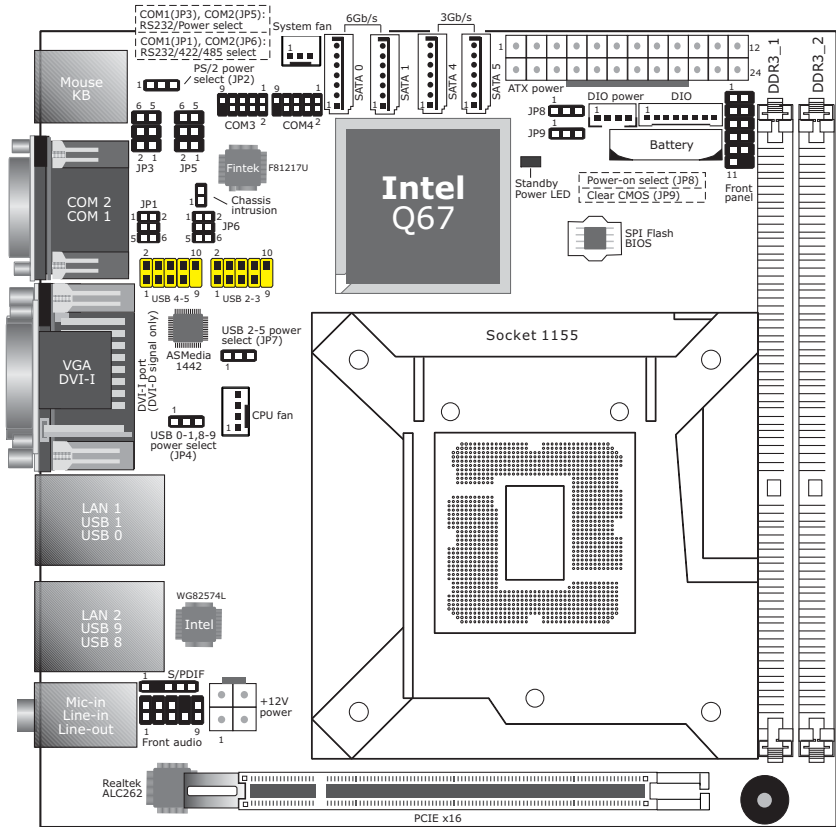

RS232/Power Select: COM1 (JP3), COM2 (JP5)	
RS232 (default)	1-3 (RT), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On

RS232/422/485 Select: COM1 (JP1), COM2 (JP6)	
RS232 (default)	1-2 On
RS422 Full Duplex	3-4 On
RS485	5-6 On

Power-on Select		JP8
Power-on via power button (default)		1-2 On
Power-on via AC power		2-3 On
Power-on via WOL After G3		

USB Power: 0-1, 8-9 (JP4), 2-5 (JP7)	
+5V (default)	1-2 On
+5V_standby	2-3 On

Clear CMOS Data		JP9
Normal (default)		1-2 On
Clear CMOS Data		2-3 On

PS/2 Power		JP2
+5V (default)		1-2 On
+5V_standby		2-3 On



Battery Notice

Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.