


DFI®

DL631-C226

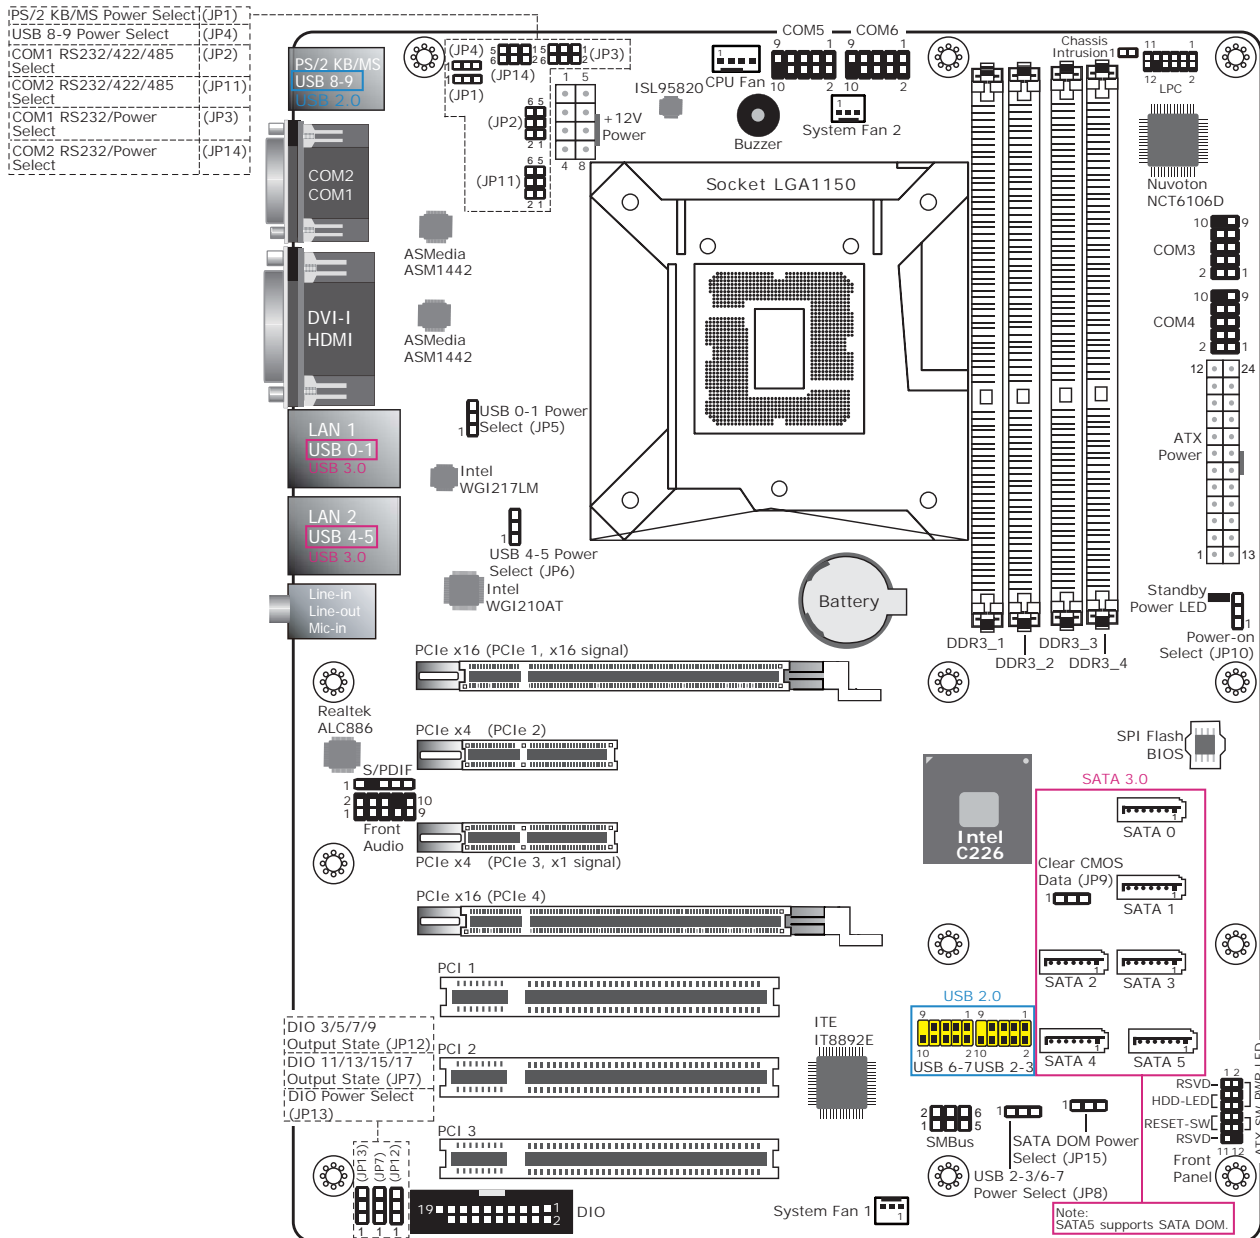

PS/2 Keyboard/Mouse Power Select	JP1
+5V (default)	1-2 On
+5V_standby	2-3 On
Clear CMOS Data	JP9
Normal (default)	1-2 On
Clear CMOS Data	2-3 On
USB Power Select: 0-1 (JP5), 2-3/6-7 (JP8), 4-5 (JP6), 8-9 (JP4)	
+5V (default)	1-2 On
+5V_standby	2-3 On
RS232/RS422/RS485 Select: COM 1 (JP2), COM 2 (JP11)	
RS232 (default)	1-2 On
RS422 Full Duplex	3-4 On
RS485	5-6 On
RS232/Power Select: COM 1 (JP3), COM 2 (JP14)	
RS232 (default)	1-3 (RI), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On

Digital I/O Power Select	JP13
+5V_standby (default)	1-2 On
+5V	2-3 On
Digital I/O Output State: DIO 3/5/7/9 (JP12) DIO 11/13/15/17 (JP7),	
+5V or +5V_standby (default)	1-2 On
GND	2-3 On
Power-on Select	JP10
Power-on via Power Button (default)	1-2 On
Power-on via AC Power; Power-on via WOL after G3	2-3 On
SATA DOM Power Select	JP15
GND (default)	1-2 On
+5V	2-3 On

Note:
SATA5 supports SATA DOM.

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.