


DFI®

SB331-D

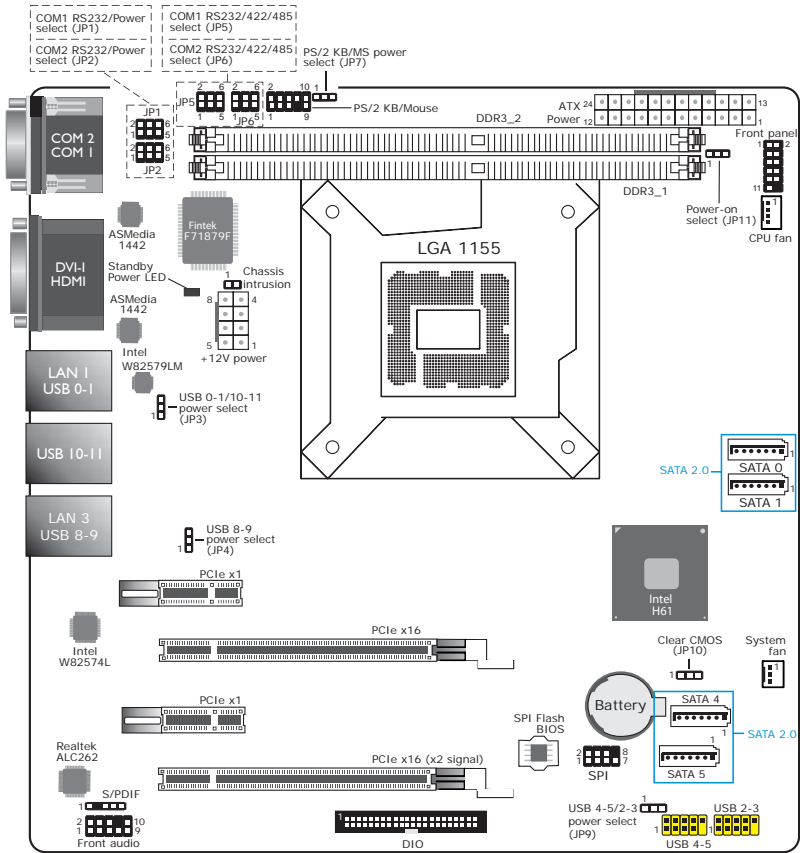

USB Power Select : 0-1/10-11 (JP3), 8-9 (JP4), 4-5/2-3 (JP9)	
+5V (default)	1-2 On
+5V_standby	2-3 On

Clear CMOS Data		JP10
Normal (default)	1-2 On	
Clear CMOS Data	2-3 On	

RS232/RS422/RS485 Select: COM 1 (JP5), COM 2 (JP6)	
RS232 (default)	1-2 On
RS422 Full Duplex	3-4 On
RS485	5-6 On

PS/2 KB/MS Power Select		JP7
+5V (default)	1-2 On	
+5V_standby	2-3 On	

Power-on Select		JP11
Power-on via power button (default)	1-2 On	
Power-on via AC power; Power-on via WOL After G3	2-3 On	

RS232/Power: COM 1 (JP1), COM 2 (JP2)	
RS232 (default)	1-3 (RI), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On



Battery Notice

Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.

Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.