



DFI®

BT253

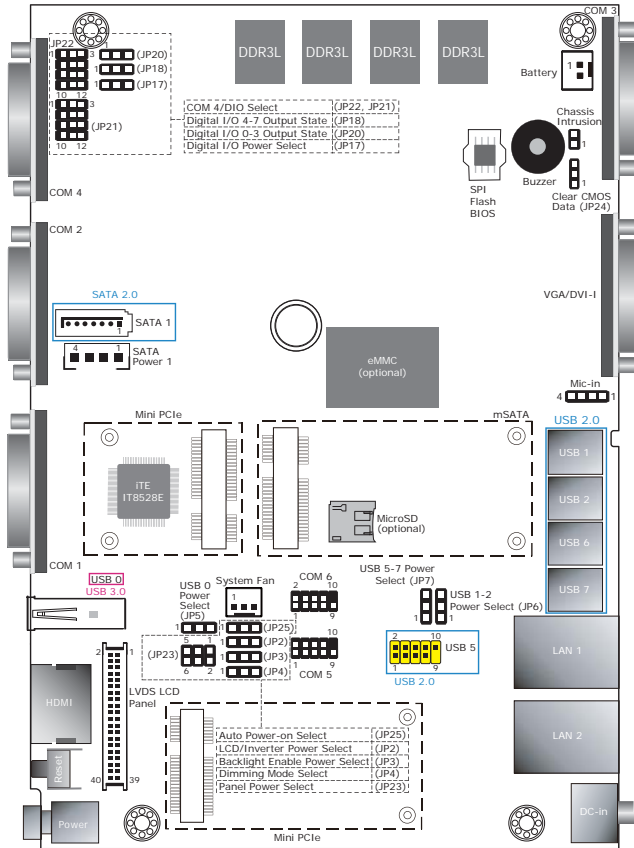

TOP

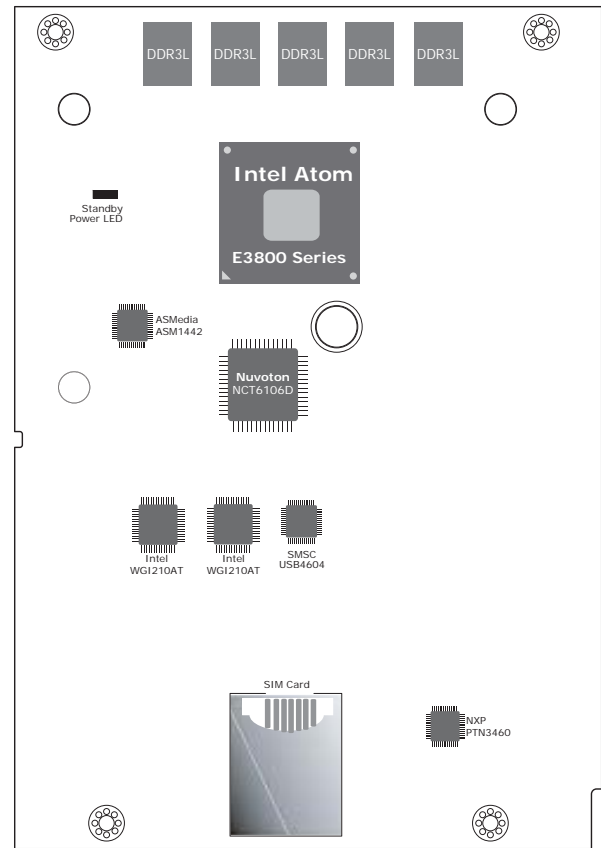

BOTTOM

USB Power Select: 0 (JP5), 1-2 (JP6), 5-7 (JP7)	
+5V_standby (default)	1-2 On
+5V	2-3 On

Clear CMOS Data		JP24
Normal (default)		1-2 On
Clear CMOS Data		2-3 On

Panel Power Select		JP23
+12V		1-2 On
+5V		3-4 On
+3.3V (default)		5-6 On

Backlight Enable Power Select		JP3
+3.3V (default)		1-2 On
+5V		2-3 On

Dimming Mode Select		JP4
Voltage Mode		1-2 On
PWM Mode (default)		2-3 On

LCD/Inverter Power Select		JP2
+12V (default)		1-2 On
+5V		2-3 On

Auto Power-on Select		JP25
Power-on via power button (default)		1-2 On
Power-on via AC power		2-3 On

Digital I/O Output State		JP18 (DIO 4-7) JP20 (DIO 0-3)
GND (default)		1-2 On
+5V or +5V_standby		2-3 On

Digital I/O Power Select		JP17
+5V_standby		1-2 On
+5V (default)		2-3 On

COM 4/DIO Select		JP21, JP22
COM 4 (default)		1-2, 4-5 7-8, 10-11 On
DIO		2-3, 5-6 8-9, 11-12 On

Note:
You cannot use COM 4 and DIO at the same time. Please set up JP21 and JP22 together.

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommend by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

Batterie:

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.