



# DFI®

## AL551

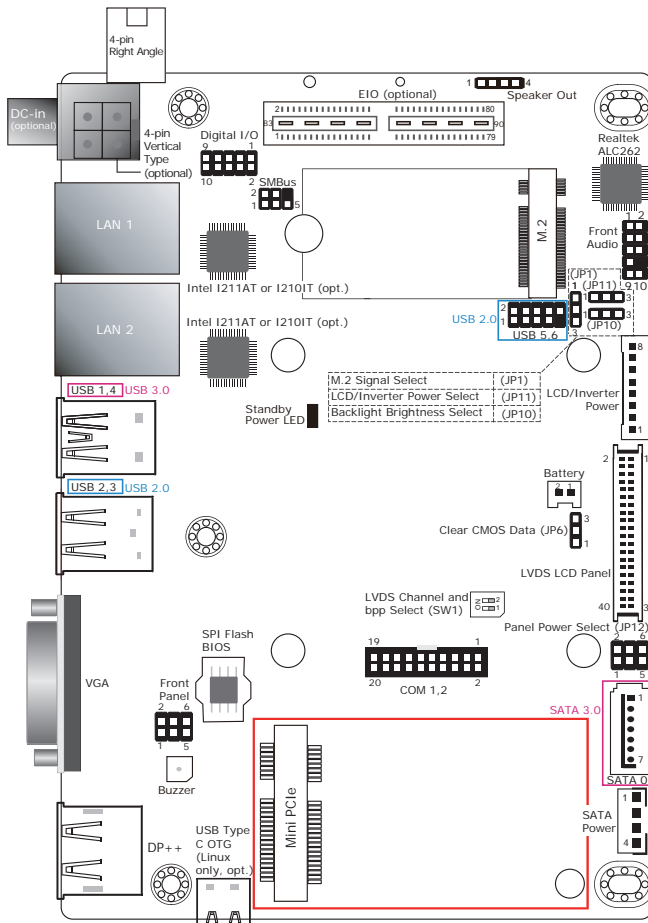

TOP

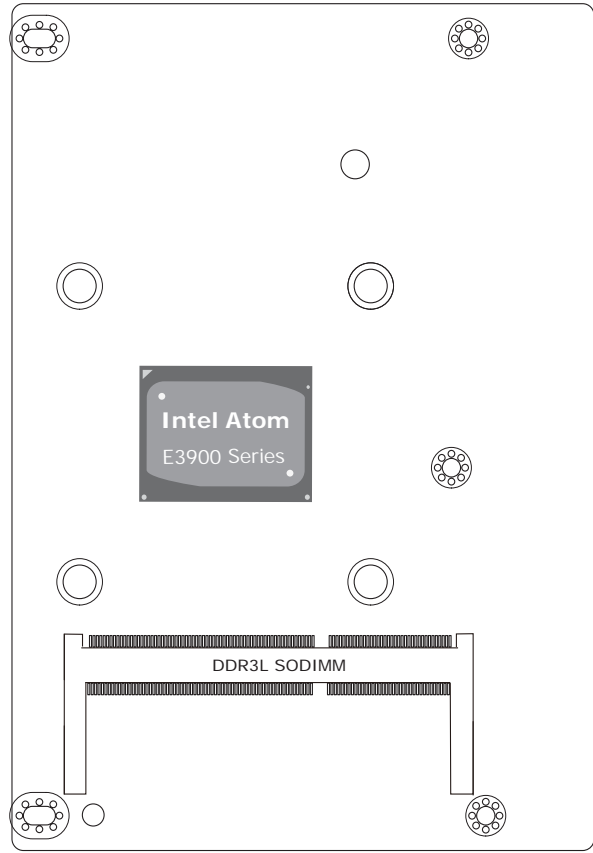

BOTTOM

<b>M.2 Signal Select</b>	<b>JP1</b>
SATA (default)	1-2 On
PCIe	2-3 On

<b>LCD/Inverter Power Select</b>	<b>JP11</b>
+12V (default)	1-2 On
+5V	2-3 On

<b>Backlight Brightness Select</b>	<b>JP10</b>
+3.3V (default)	1-2 On
+5V	2-3 On

<b>Clear CMOS Data</b>	<b>JP6</b>
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

<b>Switch 1</b>	1 On	1 Off	2 On	2 Off
<b>LVDS Channel and bpp Select</b>	Single LVDS	Dual LVDS	VESA (24bpp)	JEIDA or VESA (18bpp)

<b>Panel Power Select</b>	<b>JP12</b>
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

## Battery Notice

---



### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



### Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.