


# DFI® KD171

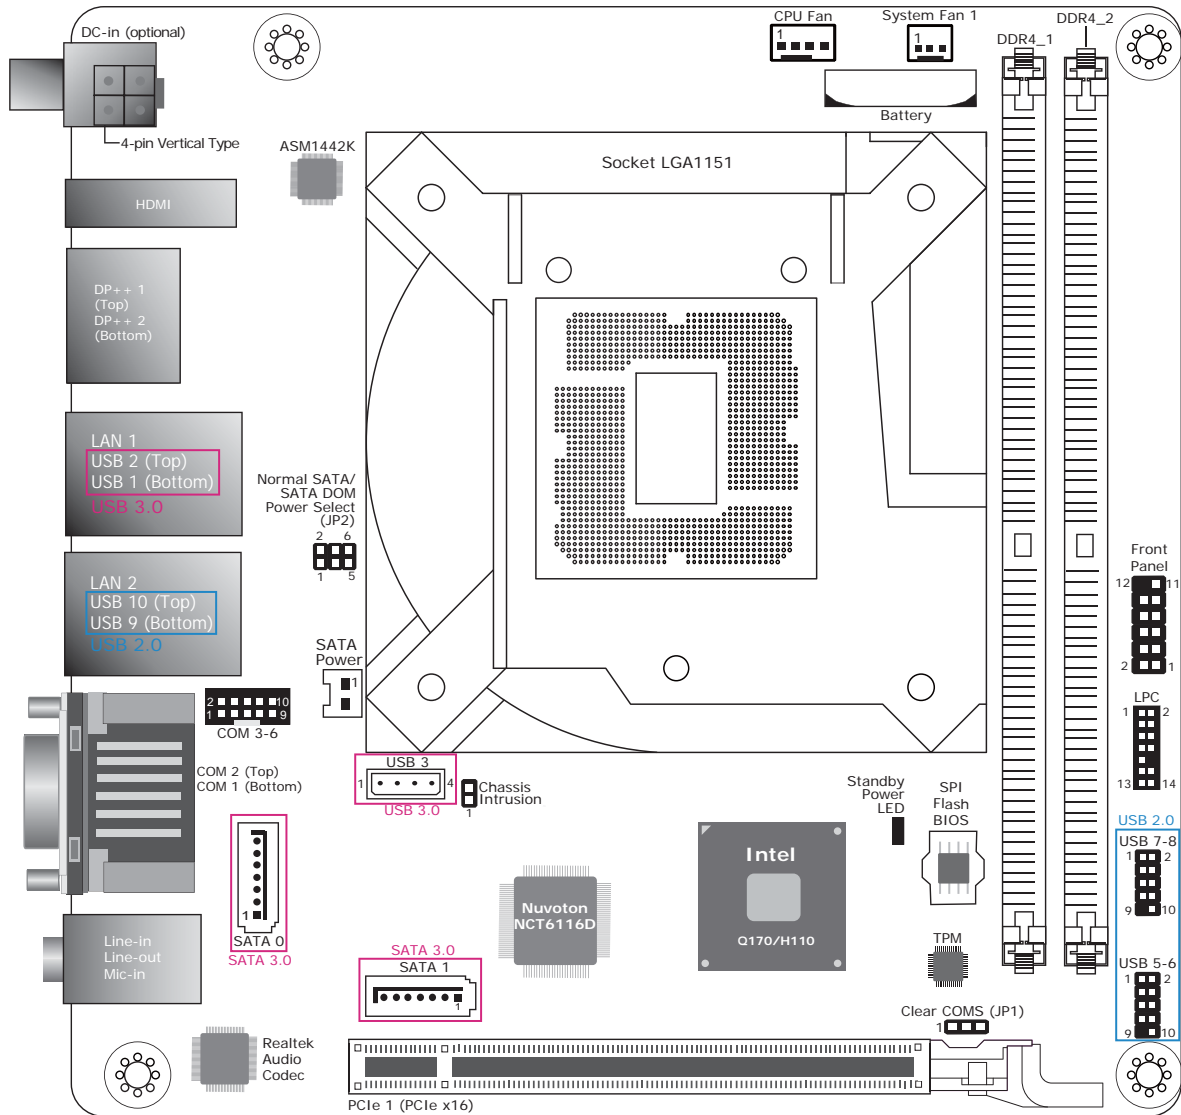

Clear CMOS	JP1
Normal (default)	1-2 On
Clear CMOS	2-3 On

Normal SATA/SATA DOM Power Select	JP2
Normal SATA (default)	3-5 (SATA 0), 4-6 (SATA 1) On
SATA DOM	1-3 (SATA 0), 2-4 (SATA 1) On

## Front Panel

	Pin	Function		Pin	Function
HD-LED	1	N.C.	PWR-LED	2	LED Power
	3	HDD Power		4	LED Power
	5	Signal		6	Signal
RESET	7	Ground	ATX-SW	8	Ground
	9	RST Signal		10	Signal
	11	N.C.			

## Battery Notice

---



### Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



### Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



### Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.