


DFI® AL170

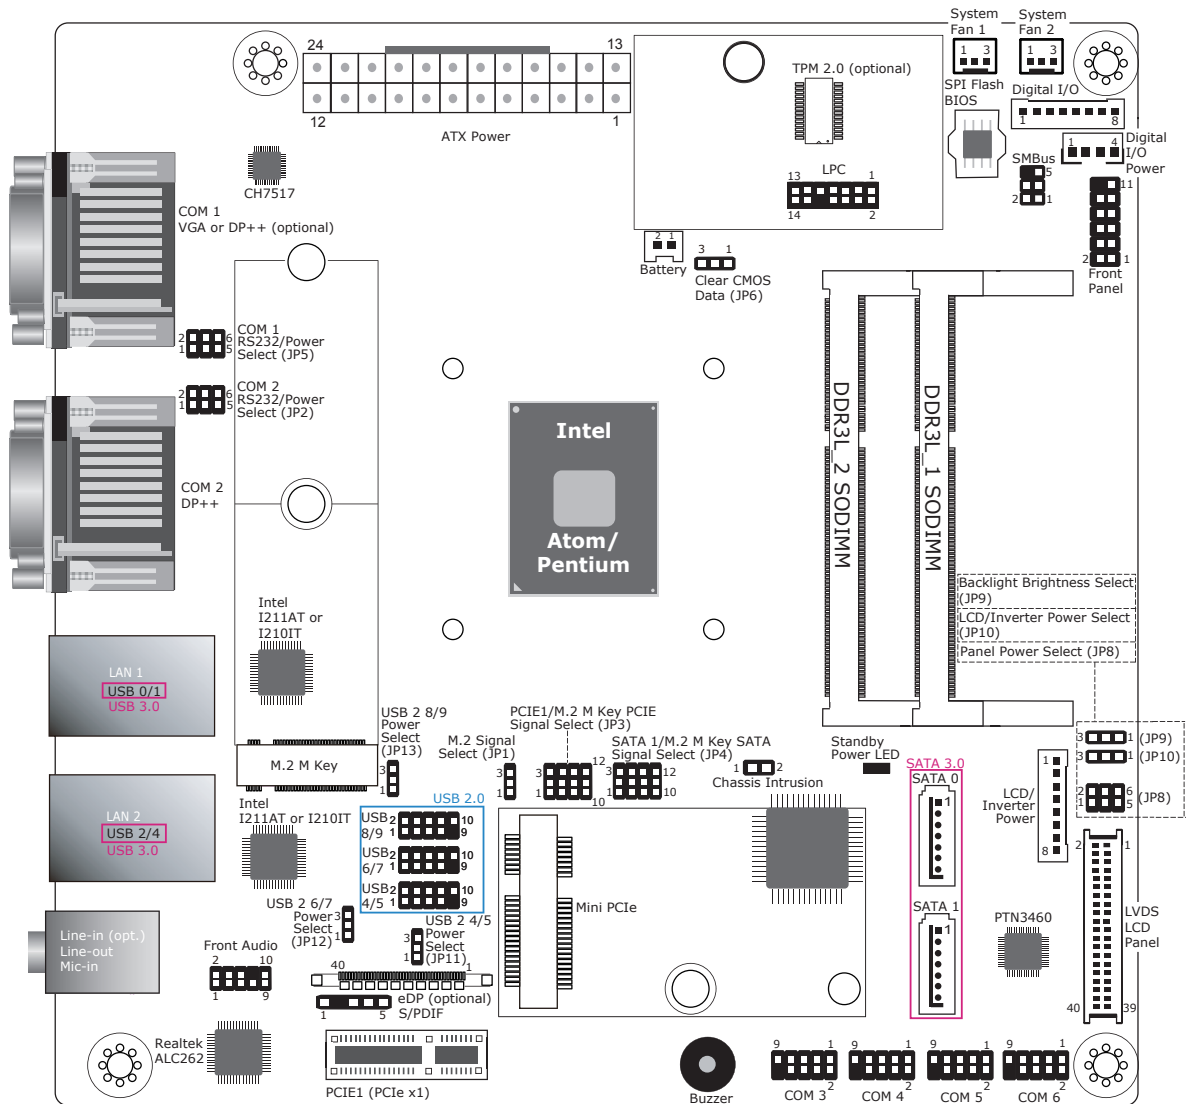

TOP

Panel Power Select	JP8
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

Backlight Brightness Select	JP9
+3.3V (default)	1-2 On
+5V	2-3 On

LCD/Inverter Power Select	JP10
+12V (default)	1-2 On
+5V	2-3 On

Clear CMOS Data	JP6
Normal (default)	1-2 On
Clear CMOS Data	2-3 On


COM Port RS232/Power Select	COM1 (JP5), COM2 (JP2)
RS232 (default)	1-3 (RI), 2-4 (DCD) On
RS232 with power	3-5 (+5V), 4-6 (+12V) On

M.2 Signal Select	JP1
SATA (default)	1-2 On
PCIe	2-3 On

SATA 1/M.2 M Key SATA Signal Select	JP4
SATA 1 (default)	1-2, 4-5, 7-8, 10-11 On
M.2 M key SATA	2-3, 5-6, 8-9, 11-12 On

PCIe1/M.2 M Key PCIE Signal Select	JP3
PCIe1 (default)	1-2, 4-5, 7-8, 10-11 On
M.2 M key PCIe	2-3, 5-6, 8-9, 11-12 On

USB 2.0 Power Select: 4/5 (JP11), 6/7 (JP12), 8/9 (JP13)	
+5VDU (default)	1-2 On
+5V	2-3 On

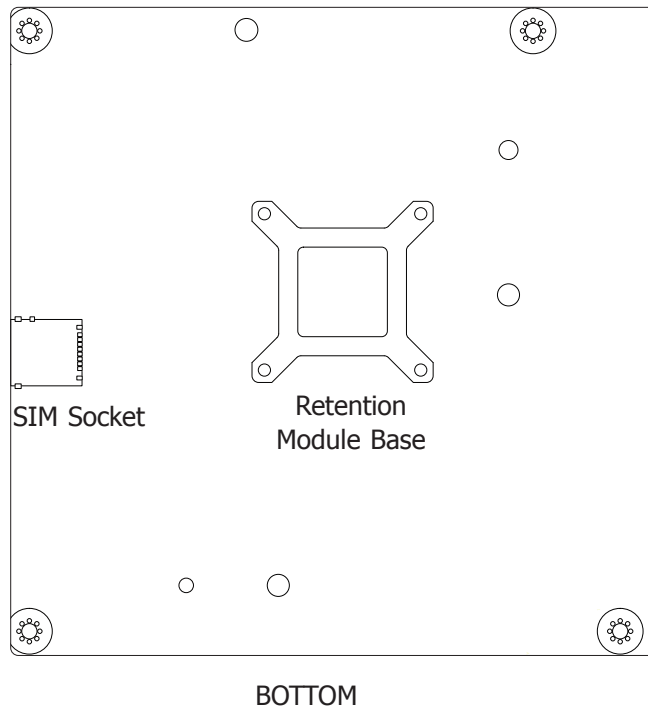

Battery Notice

Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.

Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.

Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.