



DFI

SU551 Quick Reference

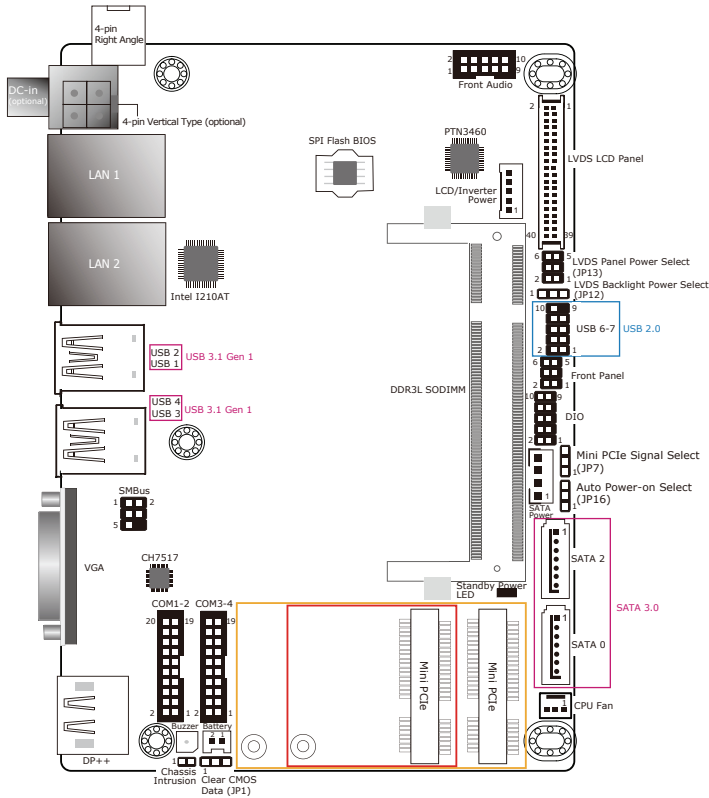

TOP

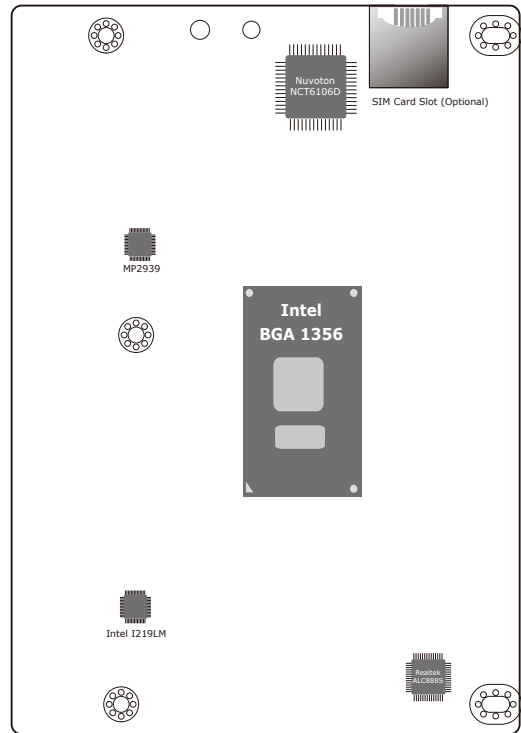

BOTTOM

LVDS Backlight Power Select	JP12
+3V3 (default)	1-2 On
+5V	2-3 On

Auto Power-on Select	JP16
Power-on via power button (default)	1-2 On
Power-on via AC power	2-3 On

LVDS Panel Power Select	JP13
+12V	1-2 On
+5V	3-4 On
+3.3V (default)	5-6 On

Mini PCIe Signal Select	JP7
mSATA (default)	1-2 On
PCIe	2-3 On

Clear CMOS Data	JP1
Normal (default)	1-2 On
Clear CMOS Data	2-3 On

DFI

Battery Notice



Battery Usage

The lithium ion battery powers the real-time clock and CMOS memory. It is an auxiliary source of power when the main power is shut off.



Safety Measures

- Danger of explosion if battery incorrectly replaced.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to local ordinance.



Mesure de Sécurité de l'usage de Batterie

- Danger d'explosion si la batterie n'est pas correctement remplacée.
- Remplacez seulement avec le même type ou équivalent recommandé par le fabricant.
- Traitez des batteries usées selon le règlement local.