


# PR811-C622 Server-grade

1st/2nd Gen Intel® Xeon® Scalable Processor Family

EATX

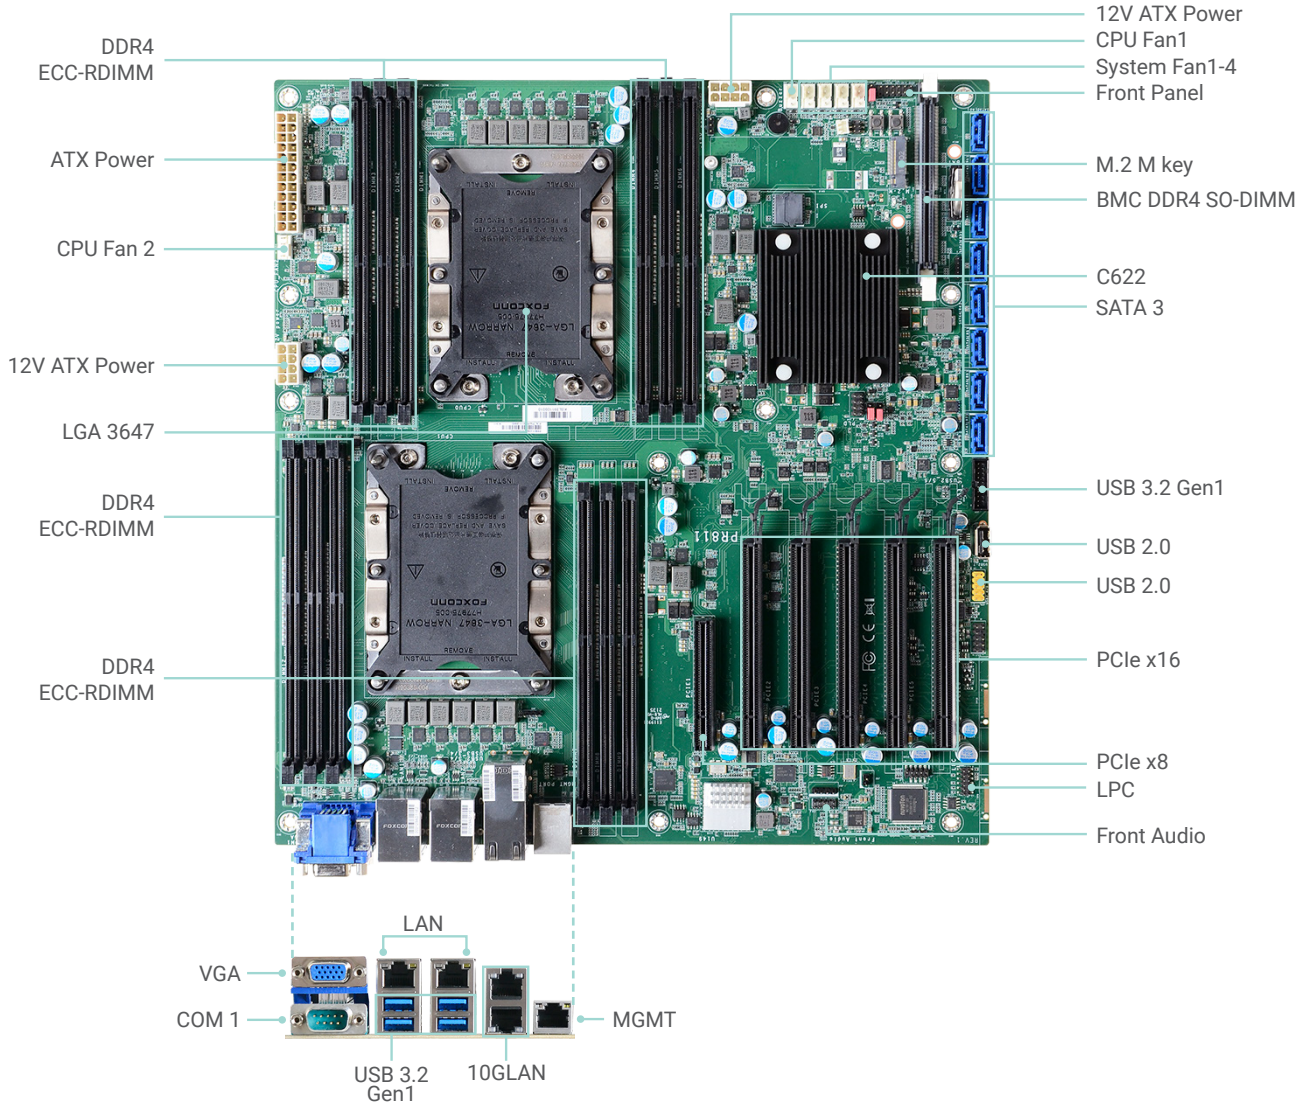

Top View

## KEY FEATURES



### DDR4

12 DDR4 ECC-RDIMM up to 768GB




### 10GLAN

2 x 10GbE



### Single Display

VGA: resolution up to 1920x1200 @ 60Hz



### Multiple Expansion


5 PCIe x16 (Gen3),  
1 PCIe x8 (Gen 3),  
1 M.2 M key,  
1 BMC Module slot for SEM2500/2510




### Rich I/O

2 Intel 10GbE, 2 Intel GbE, 2 COM, 8 SATA 3.0, 6 USB 3.2 Gen1, 5 USB 2.0

## BLOCK DIAGRAM

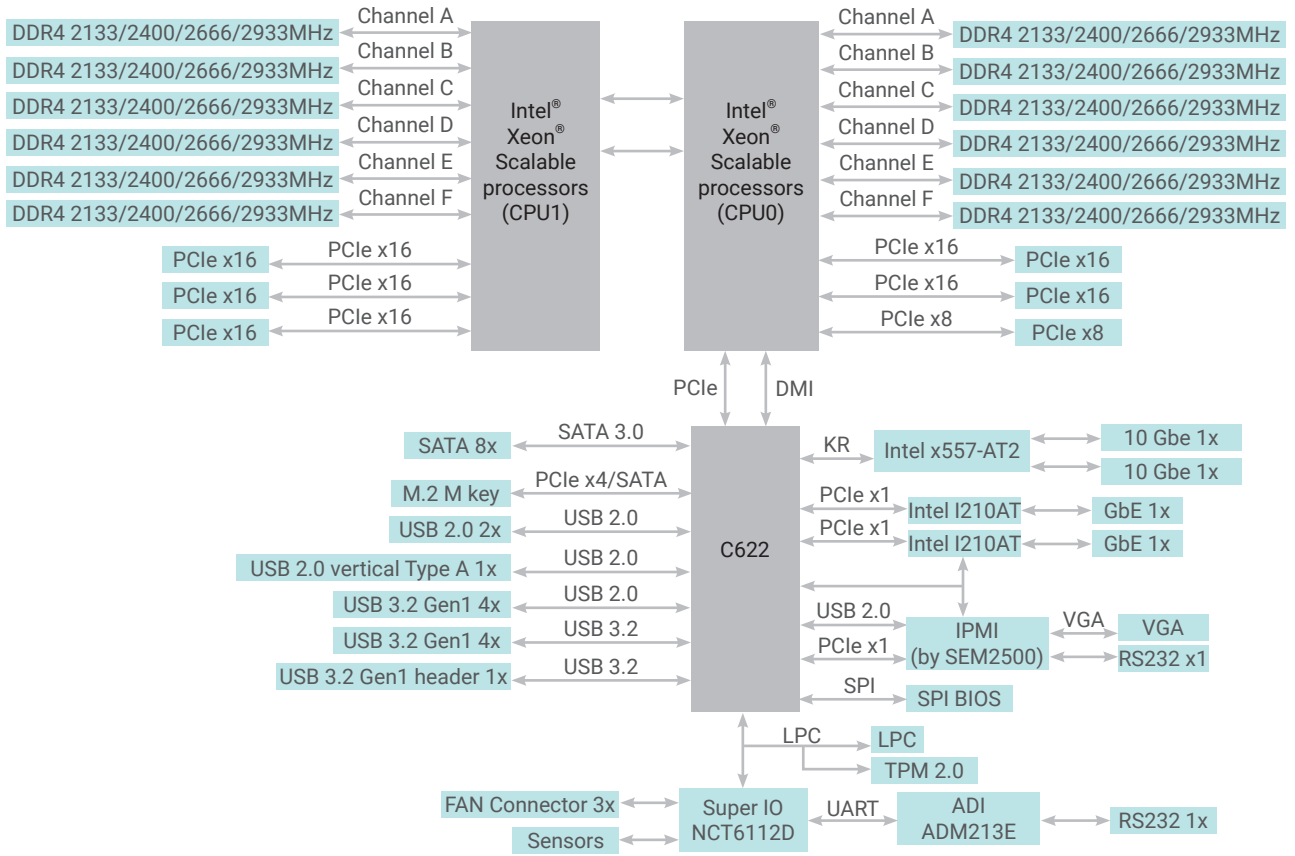

## MECHANICAL DRAWING

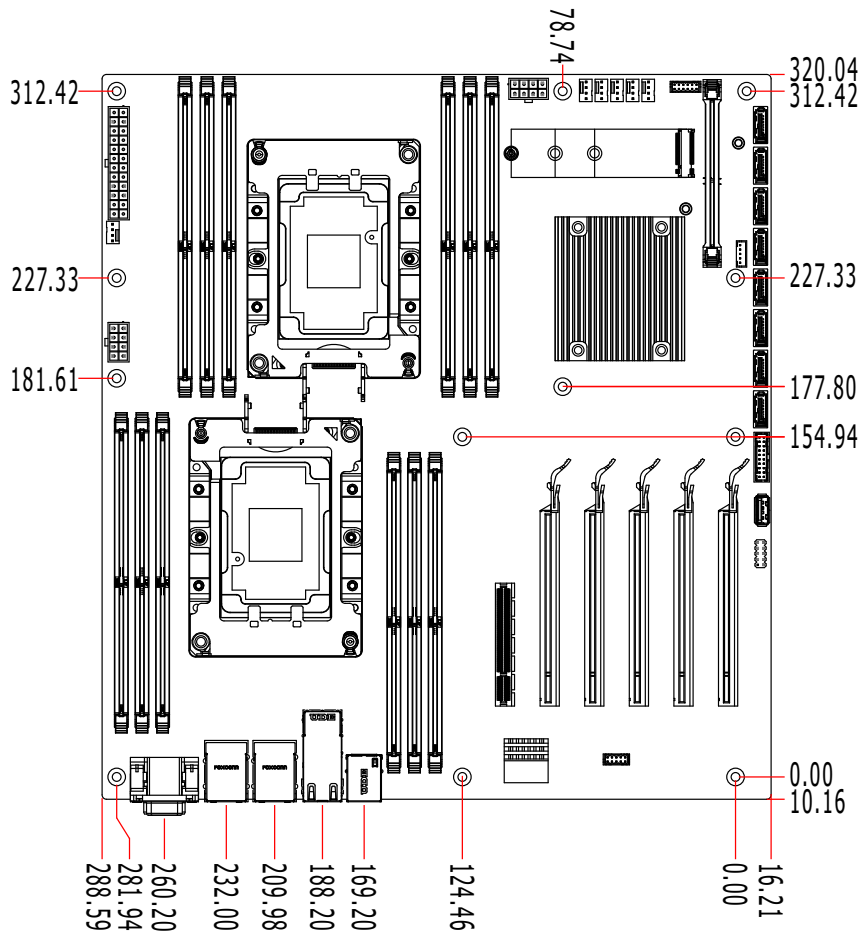

## SPECIFICATION

SYSTEM	<b>Processor</b>	<p>1st Generation Intel® Xeon® Scalable Processor Family, LGA 3647 Socket:                      Intel® Xeon® Platinum 8160T (24 Cores, 27.5M Cache, up to 3.7 GHz); 150W                      Intel® Xeon® Gold 6138T (20 Cores, 27.5M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6138 (20 Cores, 27.5M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6130T (16 Cores, 22M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6130 (16 Cores, 22M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6126T (12 Cores, 19.25M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6126 (12 Cores, 19.25M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 5120T (14 Cores, 19.25M Cache, up to 3.2 GHz); 105W                      Intel® Xeon® Gold 5119T (14 Cores, 19.25M Cache, up to 3.2 GHz); 85W                      Intel® Xeon® Gold 5118 (12 Cores, 16.5M Cache, up to 3.2 GHz); 105W                      Intel® Xeon® Silver 4116T (12 Cores, 16.5M Cache, up to 3.0 GHz); 85W                      Intel® Xeon® Silver 4116 (12 Cores, 16.5M Cache, up to 3.0 GHz); 85W                      Intel® Xeon® Silver 4114T (10 Cores, 13.75M Cache, up to 3.0 GHz); 85W                      Intel® Xeon® Silver 4110 (8 Cores, 11M Cache, up to 3.0 GHz); 85W                      Intel® Xeon® Silver 4109T (8 Cores, 11M Cache, up to 3.0 GHz); 70W                      Intel® Xeon® Bronze 3106 (8 Cores, 11M Cache, 1.7 GHz); 85W</p> <p>2nd Generation Intel® Xeon® Scalable Processor Family, LGA 3647 Socket:                      Intel® Xeon® Gold 6252N (24 Cores, 35.75M Cache, up to 3.6 GHz); 150W                      Intel® Xeon® Gold 6238T (22 Cores, 30.25M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 6230T (20 Cores, 27.5M Cache, up to 3.9 GHz); 125W                      Intel® Xeon® Gold 6230N (20 Cores, 27.5M Cache, up to 3.5 GHz); 125W                      Intel® Xeon® Gold 6230 (20 Cores, 27.5M Cache, up to 3.9 GHz); 125W                      Intel® Xeon® Gold 6226 (12 Cores, 19.25M Cache, up to 3.7 GHz); 125W                      Intel® Xeon® Gold 5220T (18 Cores, 24.75M Cache, up to 3.9 GHz); 105W                      Intel® Xeon® Gold 5218T (16 Cores, 22M Cache, up to 3.8 GHz); 105W                      Intel® Xeon® Gold 5218N (16 Cores, 22M Cache, up to 3.7 GHz); 110W                      Intel® Xeon® Gold 5215 (10 Cores, 13.75M Cache, up to 3.4 GHz); 85W                      Intel® Xeon® Silver 4216 (16 Cores, 22M Cache, up to 3.2 GHz); 100W                      Intel® Xeon® Silver 4215 (8 Cores, 11M Cache, up to 3.5 GHz); 85W                      Intel® Xeon® Silver 4214 (12 Cores, 16.5M Cache, up to 3.2 GHz); 85W                      Intel® Xeon® Silver 4210 (10 Cores, 13.75M Cache, up to 3.2 GHz); 85W                      Intel® Xeon® Silver 4209 (8 Cores, 11M Cache, up to 3.2 GHz); 70W</p>	
	<b>Chipset</b>	Intel® C622 Chipset	
	<b>Memory</b>	12 x 288-pin ECC-RDIMM up to 768GB	Single Channel DDR4 2133/2400/2666/2933 MHZ
	<b>BIOS</b>	Insyde	
	<b>GRAPHICS</b>	<b>Display</b>	1 x VGA (opt.)
	<b>Single Display</b>	VGA (opt.)	
<b>EXPANSION</b>	<b>Interface</b>	5 x PCIe x16 (Gen 3) 1 x PCIe x8 (Gen 3) 1 x M.2 2280 M key (PCIe Gen3 x4 NVMe/SATA) 1 x BMC Module slot for SEM2500/2510 Note: PCIe x8 slot is OPEN edge.	
<b>AUDIO</b>	<b>Audio Codec</b>	ALC887	
<b>ETHERNET</b>	<b>Controller</b>	2 x Intel® I210AT (10/100/1000Mbps) 1 x Intel® x557-AT2 (10GbE)	
<b>REAR I/O</b>	<b>Serial</b>	1x RS-232 (DB-9)	
	<b>Ethernet</b>	2 x GbE (RJ-45) 2 x 10 GbE x557-AT2	IPMI 2.0
	<b>USB</b>	4 x USB 3.2 Gen1	
	<b>Display</b>	1 x VGA (opt.)	
<b>INTERNAL I/O</b>	<b>Serial</b>	1 x RS-232	
	<b>USB</b>	2 x USB 3.2 Gen1 2 x USB 2.0 1 x USB 2.0 Vertical Type A	
	<b>SATA</b>	8 x SATA 3 (up to 6Gb/s)	RAID 0/1/5/10
	<b>SMBus</b>	1 x SMBus	
	<b>WATCHDOG TIMER</b>	<b>Output &amp; Interval</b>	System Reset, Programmable via Software from 1 to 255 Seconds
<b>SECURITY</b>	<b>TPM</b>	TPM 2.0	
<b>POWER</b>	<b>Type</b>	ATX	
	<b>Connector</b>	8-pin ATX 12V power	24-pin ATX power
	<b>Consumption</b>	TBD	
	<b>RTC Battery</b>	CR2032 Coin Cell	
<b>OS SUPPORT</b>		Windows 10 IoT Enterprise LTSB RS5(64-bit) Windows Server 2019 Windows Server 2016	Linux
<b>ENVIRONMENT</b>	<b>Temperature</b>	Operating: 0 to 40°C	Storage: -40 to 85°C
	<b>Humidity</b>	Operating: 5 to 90% RH	Storage: 5 to 90% RH
	<b>MTBF</b>	TBD	
<b>MECHANICAL</b>	<b>Dimensions</b>	EATX Form Factor	305mm (12") x 330mm (13")
	<b>Height</b>	PCB: TBD	Top Side: TBD mm Bottom Side: TBD
<b>STANDARDS AND CERTIFICATIONS</b>	<b>Certification</b>	CE, FCC, RoHS, UKCA	

## ORDERING INFORMATION

Model Name	P/N	GbE	10GbE	IPMI-Mgmt	RS-232	USB 3.2 Gen1	USB 2.0	VGA	TPM	BMC Module	Temp.
PR811-C622IR	770-PR8111-000G	2	2	0	1	6	3	0	1	0	0 to 40°C
PR811-C622IRV	770-PR8111-100G	2	2	0	1	6	3	1	1	SEM2510-VGA	0 to 40°C
PR811-C622IRI	770-PR8111-200G	2	2	1	2	6	3	1	1	SEM2500-VGA/IPMI	0 to 40°C
PR811-C622IRV	770-PR8111-300G	2	0	0	1	6	3	1	1	SEM2510-VGA	0 to 40°C

## PACKING LIST

1 PR811-C622 motherboard	
1 I/O shield	TBD
1 M.2 screw for 2280	A32-112016-041G
1 CPU clip	348-436471-100G
1 SEM 2500/2510 (by orderd P/N)	TBD

## OPTIONAL ITEMS

USB 2.0 port cable (Length: 350mm)	A81-001066-016G
SATA cable (Length: 500mm)	332-553001-005G
USB 3.2 Gen1 cable (Length: 320mm)	A81-001052-023G
Cooler (Narrow ILM LGA 3647)	A71-101400-000G